



Bytte av fjærer i rullgardin Changing springs in Ertec roller blends

Versjon

Versjon 1.0

Dato:

26.06.2012

Bytte / oppgradering av fjærer i rullgardin / Oppgrading the roller blinds:

Under er beskrevet hvordan man oppgraderer og bytter til doble fjærer i eksisterende rullgardiner.


English

Below it is described how to upgrade and switch to double springs for Ertec roller blinds.

Step 1

Demonter rullgardinkassett fra takluken i båten (3 skruer)



Disassemble the roller blinds box from the sliding roof (3 small screws)

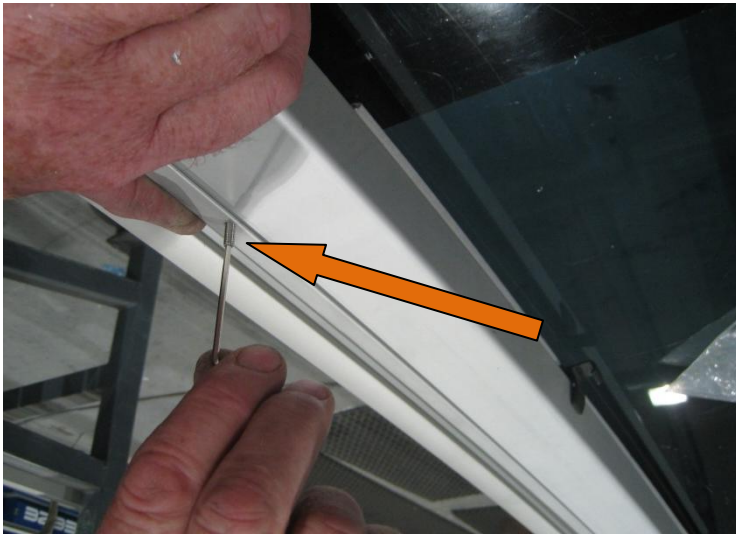

Step 2

Demonter brakett ved å løsne skruene i bunn. Trekk deretter braketten ut til siden slik at rullgardinen kan trekkes ut til siden.



Disassemble the bracket and pull it out so the roller blinds is free

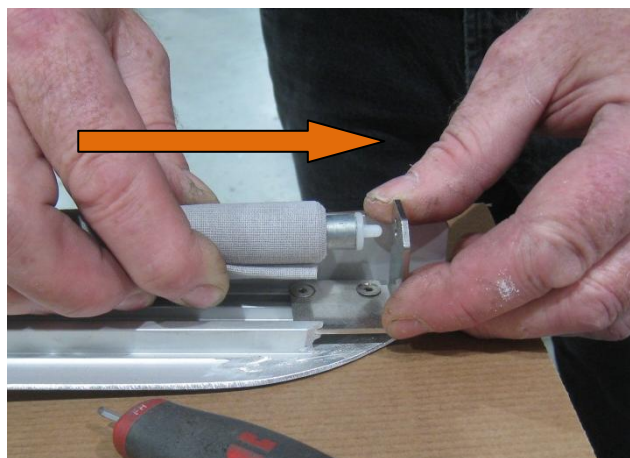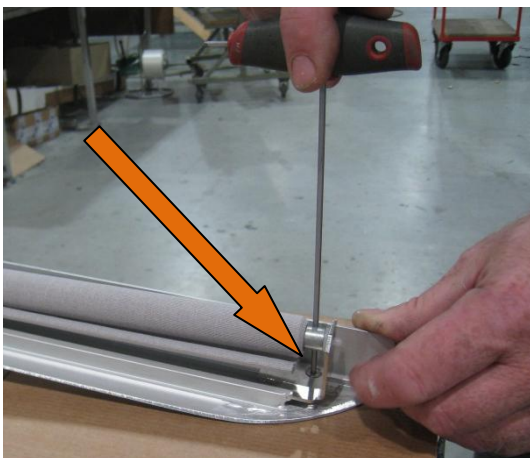

Step 3

Trekk fjæra og opplagringen på motsatt side ut av senterrøret.

Pull the spring and the bearing on the opposite side out

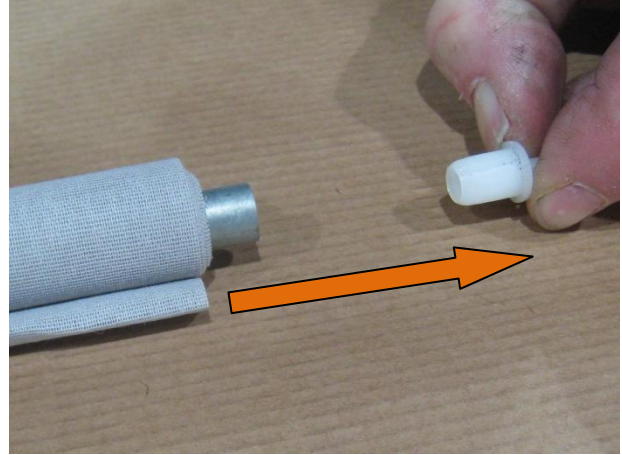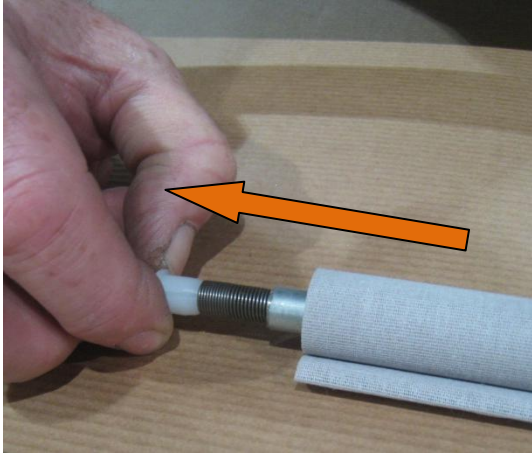

Step 4

Demonter begge håndtakene fra duken. Dette gjøres for å forenkle monteringen etterpå.


Disassemble the handles from the fabric



Step 5

Sett inn nye fjærer på høyre og venstre side. Det er meget viktig at høyre fjær plasseres på høyre side (merket med 1 prikk) og tilsvarende at venstre fjær plasseres på venstre side merket med 2 prikker).


Assemble the new springs on both sides. It is very important that they are position on the correct side. The spring with 1 dot on the right side and the one with 2 dots on left hand side.

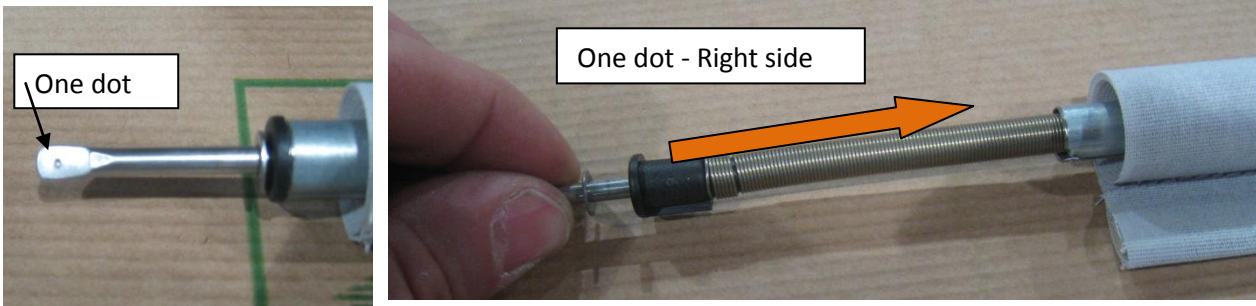

Step 6

Monter rullgardinen med nye fjærer tilbake i braketter med 1mm klaring sideveis

Assemble the roller blends with new springs back into the bracket with 1mm space sideways.

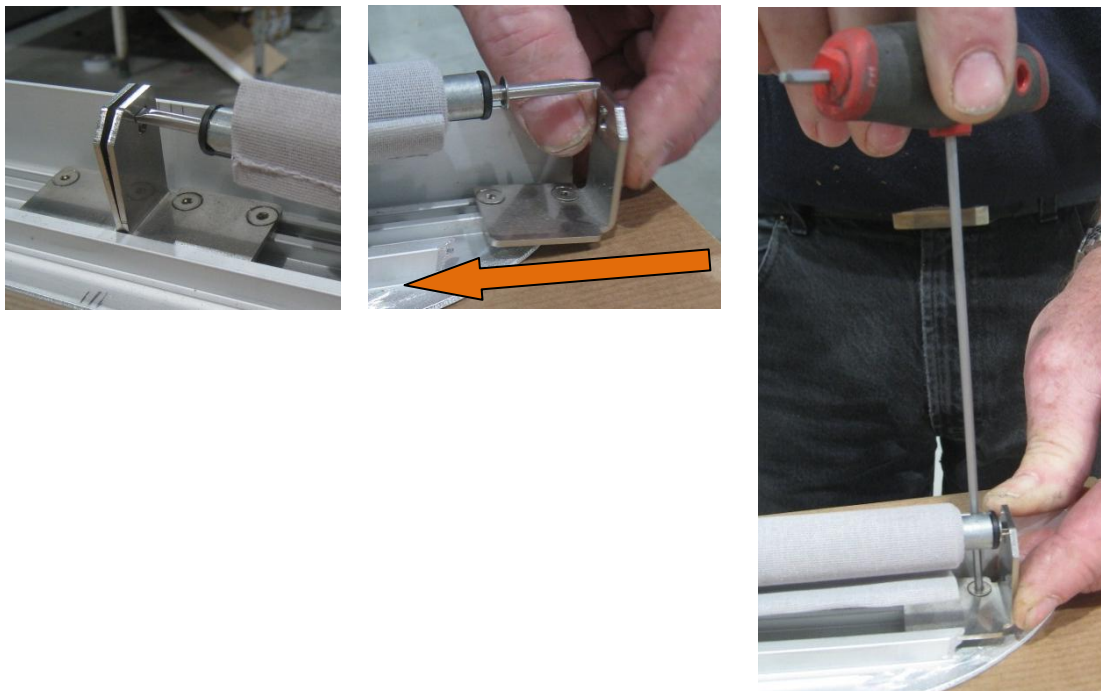

Step 7

Oppstramming av rullgardin. Roter rullgardin 6 runder i pilens retning. Merk: Det må ikke roteres mer enn 10 runder da dette kan medføre skade på fjærene.

Tension in the spring. Rotate the roller blends 6 rounds in the same direction as the arrow. Do not rotate more than 10 rounds because this can damage the springs.



Step 8

Monter på plass håndtak.


Assemble the two handles.



Step 9

Testing: Trekk rullgardinen ut og sjekk at den trekker seg fint tilbake.

Testing: Pull out the roller blends and check that it is working okay.

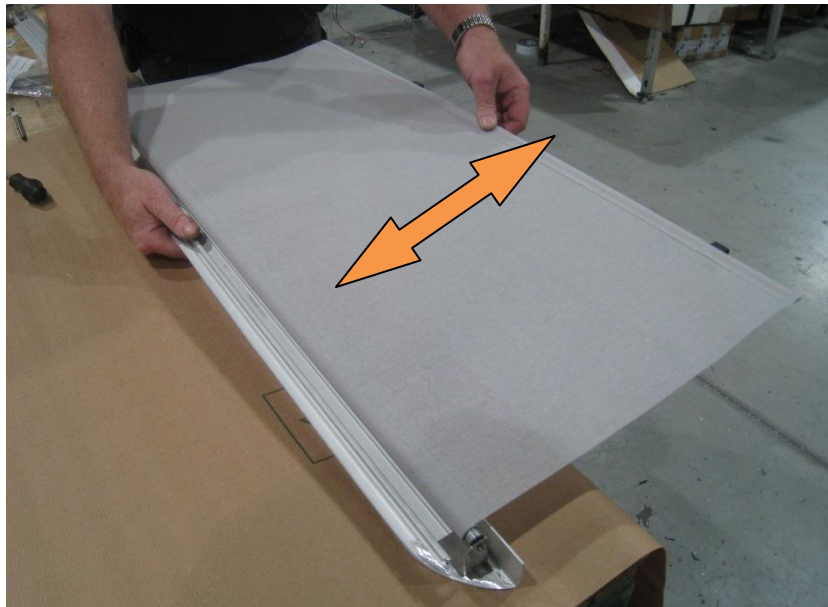

Step 10

Monter tilbake rullgardinkasett i båten med 3 skruer som vist.

Assemble the roller blend box into the roof using 3 screws

